

■ 产品特性 Speciality

滤料为优质聚酯合成纤维（粗效过滤棉）；外框为金属外框，容易更换；符合欧洲和美国防火分类标准DIN53438-F1, UL900-class2；耐湿度可达100%；耐温80℃

■ 用途 Using

- 空调通风系统的预过滤和二级过滤；洁净室进风或回风过滤

■ 性能参数 Specification

级别 Class	尺寸Size	额定风量 (m ³ /h) Rated air flow	初阻力与额定风量之比 The ratio of the initial resistance and the rated air flow		
	W*H*D (mm)		70%	100%	120%
G3	595*595*46mm	3400	35	65	90
G3	595*595*96mm	3400	30	55	75
G4	595*595*46mm	3400	50	85	110
F5	595*595*46mm	3400	85	130	190
F5	595*595*96mm	3400	75	105	145



密折式过滤器

Foldaway filter

■ 产品特性 Speciality



滤料为粗效过滤棉，容尘量大，阻力低；外框为金属外框，容易更换；符合欧洲和美国防火分类标准DIN53438-F1, UL900-class2；耐湿度可达100%；耐温80℃

■ 用途 Using

空调通风系统的预过滤和二级过滤；洁净室进风或回风过滤

■ 性能参数 Specification

级别 Class	尺寸size W*H*D (mm)	初阻力 (Pa) Initial resistance	终阻力 (Pa) Final resistance	额定风量 (m ³ /h) Rated air flow
G3	595*595*20	30	200	3900
	595*595*96			4200
	595*595*105			4500
	595*595*120			
G4	595*595*20	38	260	3400
	595*595*46			4200
	595*595*105			
	595*595*120			4500

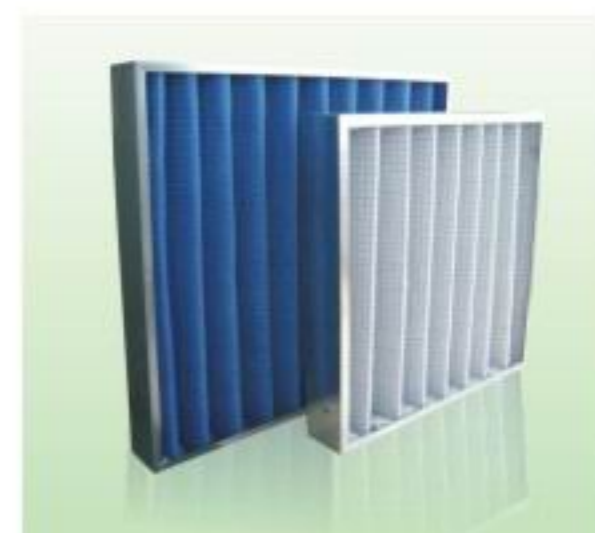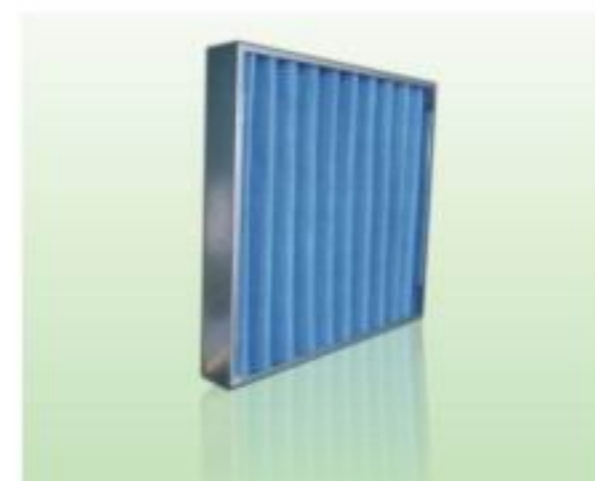

● 注：可根据客户要求定做其它规格尺寸及厚度。 Remark: Wide variety of sizes and thickness.