


风琴式油漆过滤器可给喷涂工作带来极大的好处，它属于折叠类型，皱纹结构可有效吸收超范围的过喷涂，过滤的概念，就像下方图示，强制过喷气流多次改变方向流动，这样那些比空气重的颗粒便会粘附在纸壁上，不会随气流带走。过喷物于过滤器的褶里从低部填充，直至过喷物完全堵塞，过滤器便需更换

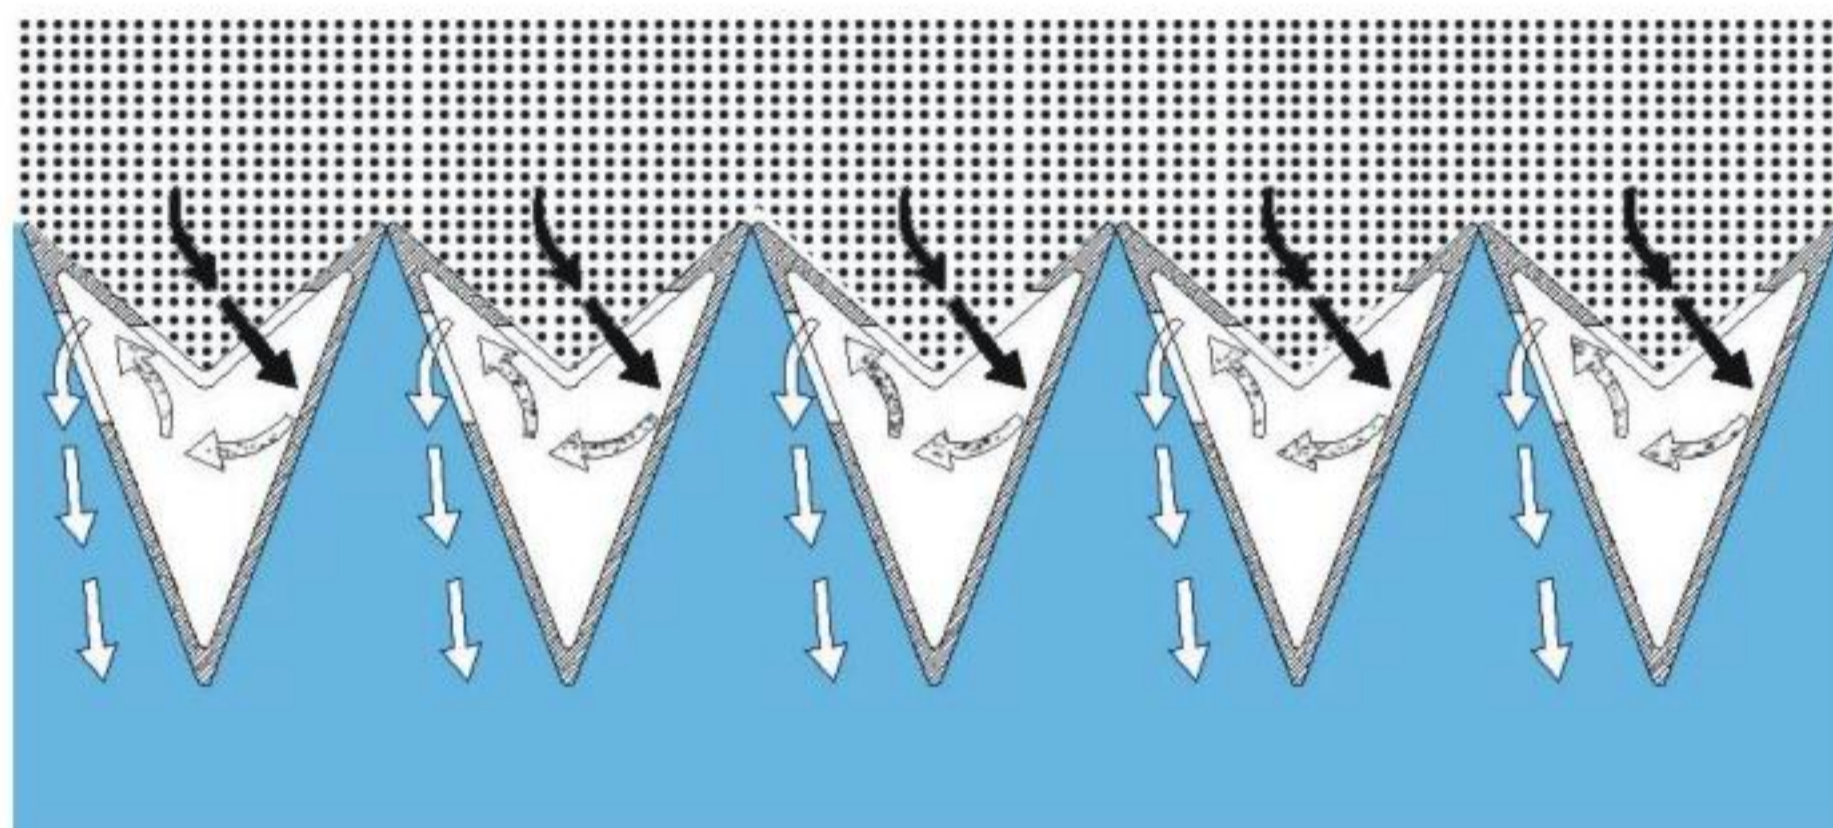

风琴式过滤器的过滤效率会随着饱和度增加而增加。这点与纤维过滤棉是完全相反的。纤维过滤棉的过滤效率会随着饱和度增加而下降（表面堵塞）。根据涂料的类型号，特性、固含量状态。过滤效率可达到98%

Organ painting filter is good for the spray painting. It belongs to the foldaway. The filtration concept as below picture

Organ filter' s efficiency will increase along with the saturation' s increases. This is different from the fibre filter media. The fibre filter media' s efficiency will descend along with the saturation' s increases. The efficiency will up to 98%

它的几何设计有助正面风速分布，特点：

- 低风阻、高性能、低成本
- 正面风速1米/秒
- 超越其他过滤器的使用寿命，最高可达六倍
- 所有类型的喷漆柜均可轻易改装使用
- 吸附容量达13公斤/平方米
- 标准尺寸数据：长=10米、宽=0.75米/0.9米/1米/1.25米
- 非标准尺寸可根据要求定做

### Specility:

- Low air flow resistance, high performance, low cost
- The face wind speed 1/s
- Longer service life than any other filters, 6 times as other
- Adsorptive capability up to 15kg/m<sup>2</sup>
- Standdard size: length=0.75m width=0.75m/1m/1.25m
- Any size is available according to the customer' s requirement

### ■ 用途 Using

涂料、聚酯、粘合剂、清漆、沥青等.....

最佳使用效果:平均分布25褶/米

Main application: dope, polyester, bond, varnish, asphaltum and so on

